



Early **detection**, less
infection!

Reduce the possibility of mass infection and
detect key vitals with SymptomSense™.

 **SYMPTOM**sense™

The most effective approach to screen vitals.

Ready to Screen



External Body Temperature





Heart Rate



Blood Oxygen Level



Respiration Rate

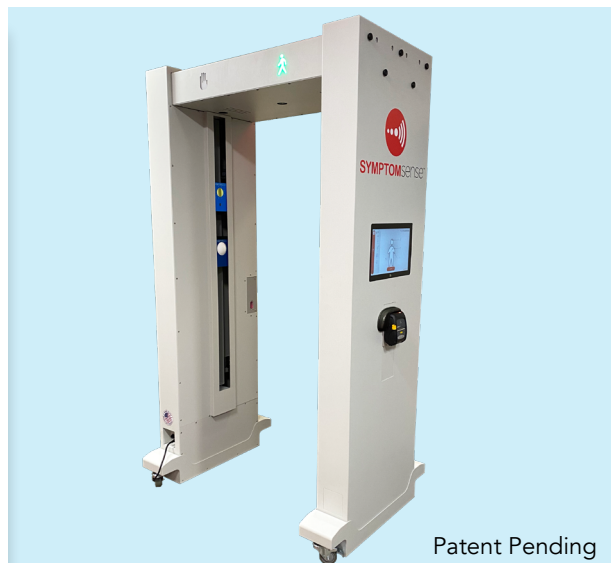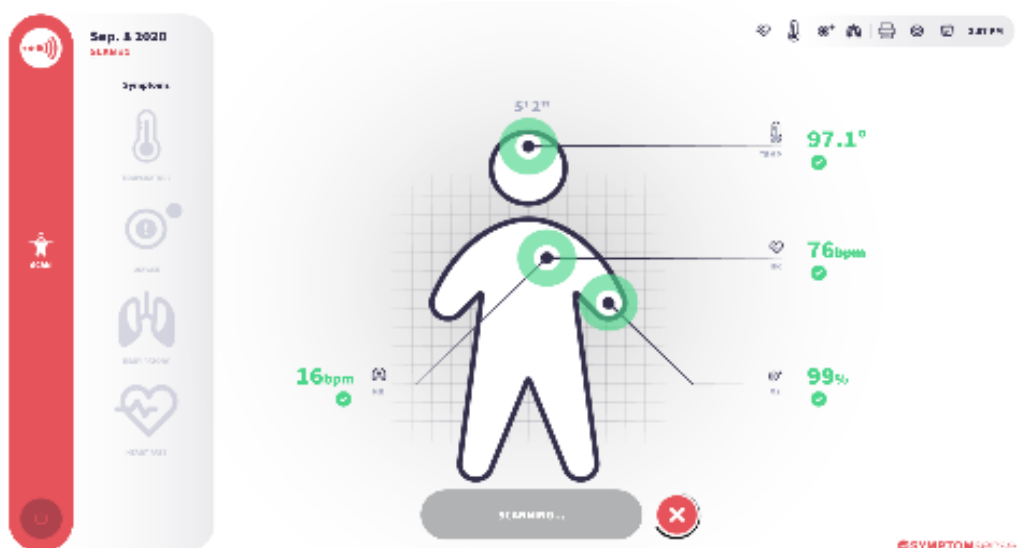

SymptomSense
101 Comac St.
Ronkonkoma, NY 11779

877-363-8273
www.symptomsense.com

© 2020 SymptomSense



Inspire **Confidence**

Create a safer and
healthier environment



SYMPTOMsense™

Specifications: SS1500i

Physical Characteristics

Exterior Gateway Dimensions	49" W x 87" H x 25.5" D (1.25 m x 2.21 m x 0.65 m)
Interior Gateway Dimensions	36" W x 80" H x 25.5" D (0.91 m x 2.03 m x 0.65 m)
Weight	250 lbs. (113.40 kg)
Frame Material	Laminated aluminum
Display	LCD Touch Screen

Environment

Operating Temperature	66° F (19° C) to 74° F (23° C); Humidity up to 95% non-condensing. Verify that the environment is temperature-stable.
Throughput Rate/ Hour	Up to 120 individuals can be tested per hour. The system is capable of processing over 960 people per 8-Hr shift, with zero downtime.

Warranty*

1-year limited hardware warranty covers defects in workmanship and materials
3-year and 5-year extended service options available at time of purchase

Event Indicators

RGB LED Alert Indicators

Connectivity

Ethernet data connectivity via built-in RJ-45 connector and 802.3af interface
802.11b/g/n Wi-Fi supporting 2.4 GHz frequency band

Sensors

Blood Oxygen	External Body Temperature
Heart Rate	Respiration Rate

Input Power

Units operate at both 110 and 240V.
Fully automatic conversion, 50 or 60 Hertz, 45 watts. No rewiring, switching or adjustments needed.

*Warranty is subject to change.

